




Data sheet

ME11

Pressure Transmitter



1 Product and functional description

1.1 Performance features

Important features

- Robust device model
- Highly precise
- High degree of overload pressure safety
- Low hysteresis

Typical applications

- Relative pressure measurements

Areas of application

- Process technology
- Process technology
- Environmental technology

1.2 Product summary

The following provide an overview of the possible connectors and process connections. The code stated corresponds to the respective code in the order code.


Electrical plug

Line socket
DIN EN 175 301-803-A



Code **H**

Circular plug connector M12
DIN EN 61076-2-101
(flanged connector)

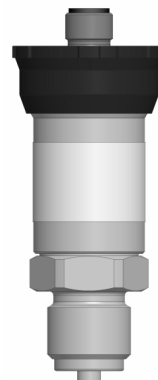


Code **M**

Fig. 1: Electrical plug


Process connections

G $\frac{1}{4}$ B




Code **85**

G $\frac{1}{2}$ B




Code **87**

$\frac{1}{4}$ -18 NPT EXT



Code **88**

Schrader®



Code **S1**

Fig. 2: Process connections

1.3 Intended use

The ME11 is a pressure transmitter with a ceramic measuring cell that is suitable for measuring over-pressure and under-pressure in non-aggressive liquid and gaseous media.

1.4 Function diagram

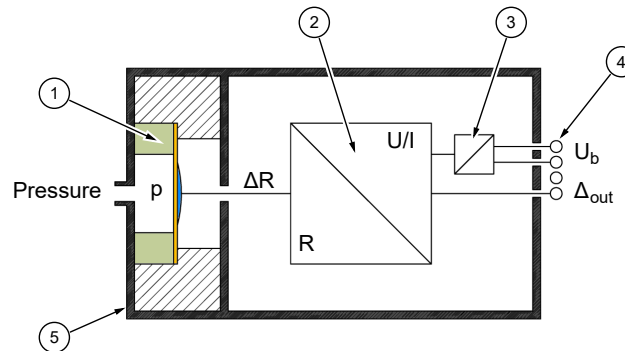


Fig. 3: Function diagram

1	Ceramic sensor	2	electronics
3	Auxiliary energy	4	Electrical connection
5	Process connection		

1.5 Design and mode of operation

The measuring pressure acts on a ceramic membrane that deforms when under pressure. There is a DMS bridge attached to the ceramic membrane. When the ceramic deforms, the output signal of the DMS bridge changes. The electronics integrated into the device convert the bridge signals into electrical unit signals 4...20 mA or 0...10 V DC um.

2 Technical Data

2.1 General information

Reference conditions (acc. to IEC 61298-1)			
Temperature	+15 ... +25 °C		
Relative humidity	45 ... 75 %		
Air pressure	86 ... 106 kPa	860 ... 1060 mbar	
Installation position	User-defined		

2.2 Input variables

Positive measuring ranges

Measuring range	SI unit	Pressure safety	
		Overpressure	Bursting-pressure
0 ... +0.6 bar	0 ... 60 kPa	4 bar	7 bar
0 ... +1 bar	0 ... 100 kPa	4 bar	7 bar
0 ... +1.6 bar	0 ... 160 kPa	4 bar	7 bar
0 ... +2.5 bar	0 ... 250 kPa	10 bar	15 bar
0 ... +4 bar	0 ... 400 kPa	10 bar	15 bar
0 ... +6 bar	0 ... 600 kPa	20 bar	35 bar
0 ... +10 bar	0 ... 1000 kPa	20 bar	35 bar
0 ... +16 bar	0 ... 1600 kPa	40 bar	70 bar
0 ... +25 bar	0 ... 2500 kPa	100 bar	150 bar
0 ... +40 bar	0 ... 4000 kPa	100 bar	150 bar
0 ... +60 bar	0 ... 6000 kPa	200 bar	250 bar

Vacuum and ± measuring ranges

Measuring range	SI unit	Pressure safety	
		Overpressure	Bursting-pressure
-1 ... 0 bar	-100 ... 0 kPa	4 bar	7 bar
-1 ... +0.6 bar	-100 ... 60 kPa	4 bar	7 bar
-1 ... +1.5 bar	-100 ... 150 kPa	4 bar	7 bar
-1 ... +3 bar	-100 ... 300 kPa	10 bar	15 bar
-1 ... +5 bar	-100 ... 500 kPa	20 bar	35 bar
-1 ... +9 bar	-100 ... 900 kPa	40 bar	70 bar
-1 ... +15 bar	-100 ... 1500 kPa	40 bar	70 bar
-1 ... +24 bar	-100 ... 2400 kPa	100 bar	150 bar

Special measuring ranges

Measuring range	SI unit	Pressure safety	
		Overpressure	Bursting-pressure
0 ... 30 PSI	0 ... 206.8 kPa	10 bar	15 bar
0 ... 60 PSI	0 ... 413.7 kPa	10 bar	15 bar
0 ... 100 PSI	0 ... 689.4 kPa	20 bar	35 bar
0 ... 160 PSI	0 ... 1103.2 kPa	40 bar	70 bar
0 ... 250 PSI	0 ... 1723.6 kPa	40 bar	70 bar
0 ... 500 PSI	0 ... 3447.3 kPa	100 bar	150 bar
-30 inHg vac ...+ 15 psi		4 bar	7 bar
-30 inHg vac ...+ 100 psi		20 bar	35 bar

2.3 Output parameters

	2-Conductor	3-Conductor
Output signal	4 ... 20 mA DC	0 ... 10 V DC
Limits	Max. 21 mA	Max. 10.5 V
Apparent ohmic resistance	$(U_b - 6V)/0.02A$	$U_b \geq 15V$ $\geq 5k\Omega$
		$U_b \geq 20V$ $\geq 2k\Omega$

2.4 Measurement accuracy

Non-linearity		< 1.0 % FS
Hysteresis		< 0.5 % FS
Characteristic curve deviation ^{*)}		1.0 %
Temperature drift	Zero point	0.07 % FS/K
	Measuring range	0.05 % FS/K

^{*)} incl. non-linearity and hysteresis

2.5 Auxiliary energy

	2-Conductor	3-Conductor
Rated Voltage	24v DC	24 V AC/DC
Admissible operating voltage	6 ... 30 V DC	19.2 ... 28.8 V AC/DC
Power input	0.7 W	0.5 W (VA)

2.6 Operating conditions

Ambient temperature range	0 °C ... +60 °C
Storage temperature range	-20 °C ... +85 °C
Medium temperature range	0 °C ... +85 °C
EMC	EN 61326-1:2013 EN 61326-2-3:2013
RoHS	EN 50581:2012
Type of protection:	IP 65 acc. to EN 60529

Materials of the parts that come into contact with the surroundings

Casing	CrNi Steel 1.4305
Device plug screw lid	Polypropylene, black
Device plug	Polyamide, brass, zinc
Cable socket	Polyamide, polycarbonate, brass, zinc

Materials of the parts that come into contact with the measuring medium

Process connection	CrNi Steel 1.4404	
Sensor membrane	Ceramic Al ₂ O ₃	
Seal ¹⁾	FKM	Fluorinated rubber, Viton®
	CR	Chloroprene rubber, Neoprene®
	EPDM	Ethylene propylene diene rubber
	H-NBR	Hydrogenated acrylonitrile butadiene rubber (for hot water applications)

¹⁾ see order code

2.7 Construction design

2.7.1 Standard casing dimensional drawing

All dimensions in mm unless otherwise stated

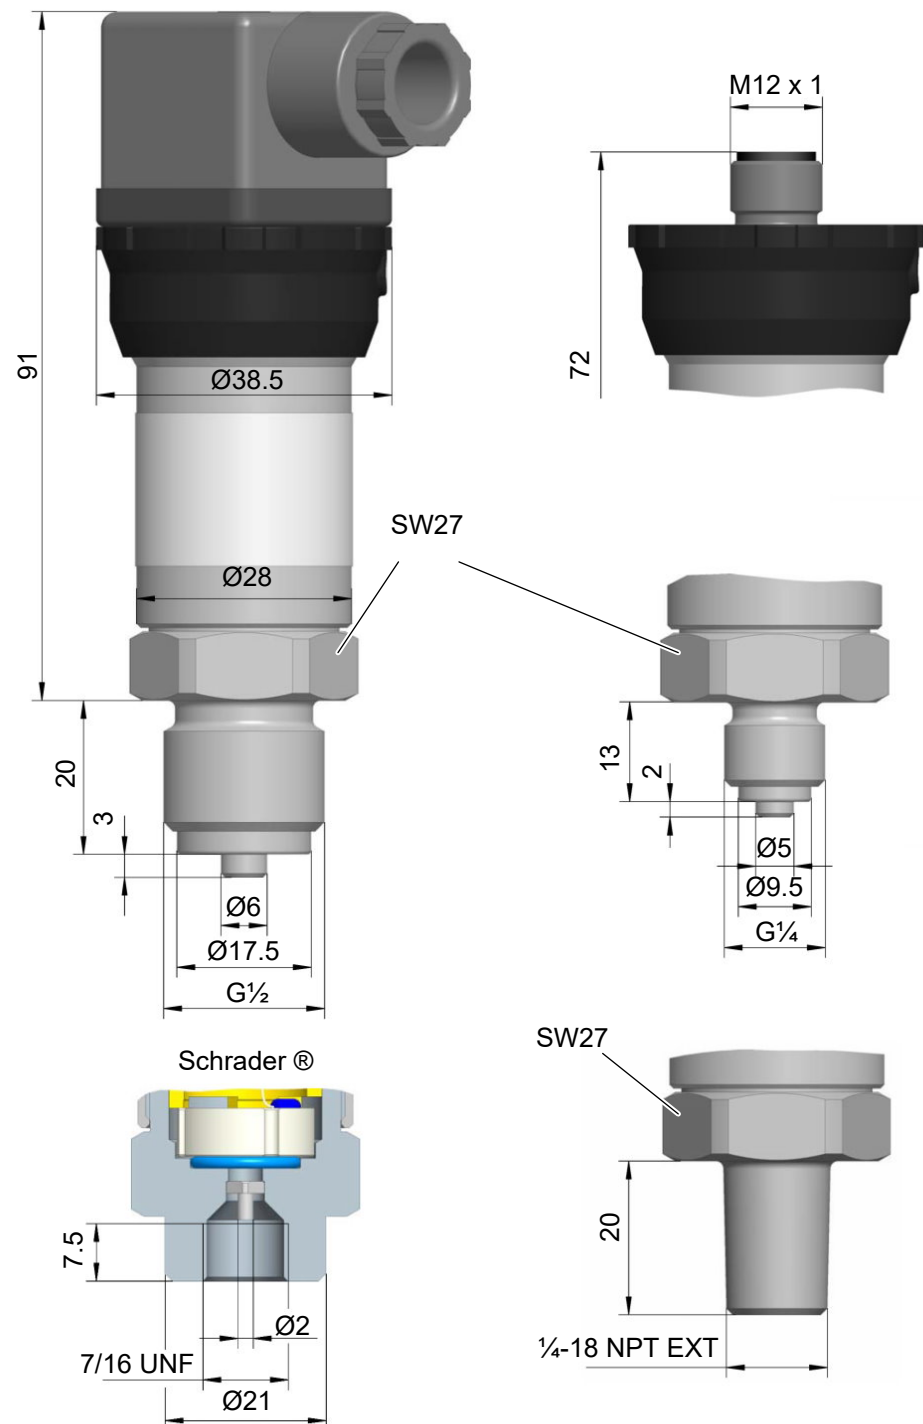


Fig. 4: Standard casing dimensional drawing

2.7.2 Process connection

1/4-18 NPT EXT	Connection shanks with external thread
Schrader®	Connection for Schrader screw connection
G3/4 B	Connection shanks with external thread
G1/4 B	Connection shanks with external thread

2.7.3 Electrical connections


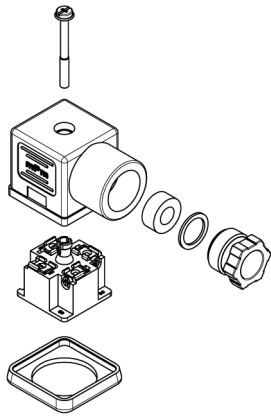


Fig. 5: Line socket DIN EN 175 301-803-A

Unit connector and cable socket DIN EN 175 301-803 Form A, 4-pin

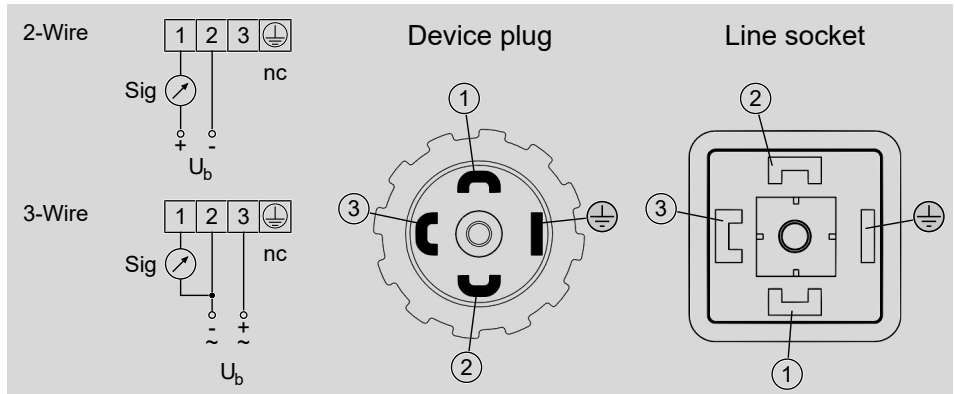

The earth connection is not connected.






Fig. 6: M12 coupling device DIN EN 61076-2-101

M12 flanged connector DIN EN 61076-2-101, 4-pin

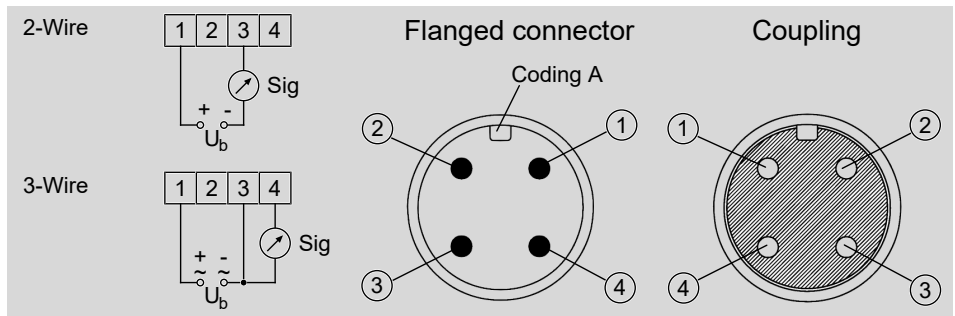

3 Order Codes

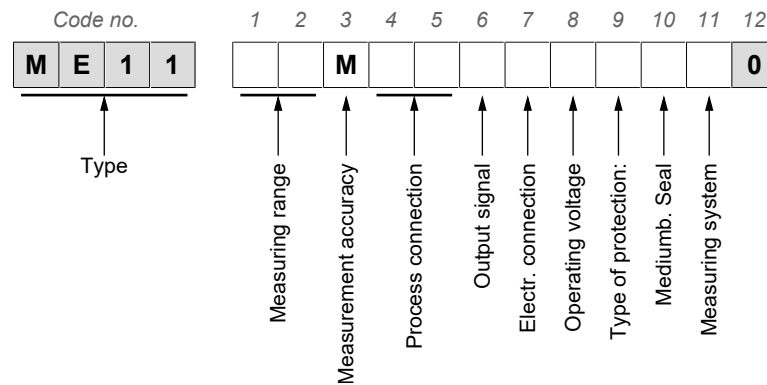

[1.2] Measuring range

01	0 ... 0,6bar
02	0 ... 1bar
03	0...1.6 bar
04	0...2.5 bar
05	0 ... 4bar
06	0 ... 6bar
07	0 ... 10bar
08	0 ... 16bar
09	0 ... 25bar
10	0 ... 40bar
11	0 ... 60bar

31	-1 ... 0 bar
32	-1...0.6 bar
33	-1...1.5 bar
34	-1...3 bar
35	-1...5 bar
36	-1...9 bar
37	-1...15 bar
38	-1...24 bar

F1	0 ... 60 kPa
F2	0 ... 100 kPa
F3	0 ... 160 kPa
F4	0 ... 250 kPa
F5	0 ... 400 kPa
F6	0 ... 600 kPa
F7	0 ... 1000 kPa
F8	0 ... 1600 kPa
G1	0 ... 2500 kPa
G2	0 ... 4000 kPa
G3	0 ... 6000 kPa

H5	0 ... 30 PSI		
H6	0 ... 60 PSI		
H7	0 ... 100 PSI		
H9	0 ... 160 PSI		
Q1	0 ... 250 PSI		
P9	0 ... 500 PSI		
S2	-30 inHg vac ... +15 psi		
S2	-30 inHg vac ... +100 psi		
[3] Measurement accuracy			
M	Characteristic curve deviation 1.0%		
[4.5] Process connection			
85	Connection shanks with external thread G $\frac{1}{4}$ B		
87	Connection shanks with external thread G $\frac{1}{2}$ B		
88	Connecting port with outer thread $\frac{1}{4}$ -NPT EXT		
S1	Connection for Schrader [®] screw connection		
[6] Output signal	Connection type	Condition (Operating voltage)	
B	4 ... 20 mA DC	2-Wire	24V DC
C	0 ... 10 V DC	3-Conductor	24 V AC/DC
[7] Electrical connection			
H	4-pin standard plug DIN EN 175 301-803-A		
M	4-pin M12 plug connection DIN EN 61076-2-101		
[8] Operating voltage			
9	24 V DC		2 wire output signal
A	24 V DC		3 wire output signal
L	24 V AC/DC		3 wire output signal
[9] Casing			
0	IP65		
R	IP65 (cast version)		
[10] Media-Contact Seal			Application
R	FKM	Fluorocarbon rubber	For O ₂ measurement mandatory
C	CR	Chloroprene Rubber	
E	EPDM	Ethylene propylene diene rubber	
H	H-NBR	Hydrogenated acrylonitrile butadiene rubber	Hot-water
[11] Measuring system			Condition
0	Default		
3	Suitable for O ₂ measurements;		O-ring FKM (BAM tested) *)
A	Silicon-free version		

*) BAM:= Bundesanstalt für Materialforschung und –prüfung

3.1 Prefabricated connection lines

Order no.	Designation	No. of Poles	length
06401993	PUR cable with M12-coupling	4-pin	2m
06401994	PUR cable with M12-coupling	4-pin	5m
06401563	PUR cable with M12-coupling	4-pin	7m
06401572	PUR cable with M12-coupling	4-pin	10m

3.2 Information about the document

This document contains all technical data about the device. Great care was taken when compiling the texts and illustrations. nevertheless, errors cannot be ruled out.

Subject to technical amendments.

Notes



FISCHER Mess- und Regeltechnik GmbH

Bielefelder Str. 37a
D-32107 Bad Salzuflen

Tel. +49 5222 974-0

Fax +49 5222 7170

www.fischermesstechnik.de
info@fischermesstechnik.de