



Measurement technology for applications in safety laboratories  
and in areas protected against contamination

**Clean Room  
Technology**

- ▲ Measuring instruments in perfection
- ▲ Precise control and monitoring applications

## CLEAN ROOM TECHNOLOGY

Perfect Measuring Equipment – from **FISCHER**



Clean rooms may be found in many areas of industry as well as in clinical environments - for example, in the pharmaceutical industry, the semiconductor and solar power industries, aerospace engineering, nanotechnology, medical engineering, research, pharmacies, etc. Clean rooms are installed anywhere where products need to be protected against contamination from airborne particles.

In order to separate clean rooms from surrounding rooms and to prevent the infiltration of particles, suitable ventilation systems are installed which create a

pressure cascade, depending on the classification of the clean room.

As far as it is required by the product, the room temperature and / or the room air humidity levels may also be measured, recorded and applied as a control variable for the building control system.

The measuring instruments from FISCHER provide the measured values required at the highest degree of precision and with long-lasting repeatability.





## The New Generation

with touch-sensitive display units, applicable in FISCHER clean room panels to monitor the room parameter



## CLEAN ROOM TECHNOLOGY

### DE24 – Room Pressure Transmitter / Display



- ▲ Capacitive low-pressure sensor
- ▲ Measuring ranges:  
Unidirectional : 0 ... 25 Pa to 0 ... 1000 Pa  
Bidirectional:  $\pm 25$  Pa to  $\pm 100$  Pa
- ▲ Max. static pressure up to 100 kPa

### FT61 – Measuring Device for Humidity / Temperature




- ▲ Capacitive humidity and temperature sensor
- ▲ Measuring ranges:  
Humidity: 0 ... 100% rH,  $\pm 3$  %  
Temperature:  $-40$  ...  $+100$  °C,  $\pm 0.5$  °C
- ▲ Interface sensor  $\rightarrow$  Indicator: I<sup>2</sup>C Bus

#### Characteristics DE24, FT61 and EA14

- ▲ Long-term stable without recalibration
- ▲ High repeatability
- ▲ LC display with colour change of backlighting as clean room signal light
- ▲ User prompt in clear text
- ▲ In-situ calibration or adjustment
- ▲ Integrated control unit / zeroing, calibration and setting without PC
- ▲ Password-protected to prevent unauthorized access
- ▲ Industry standard analogue output
- ▲ Output signal transmitter:  
0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA, 3-wire
- ▲ Output signal contacts:  
2 independent programmable solid state relays
- ▲ Operating voltage 24 V DC/AC (20 ... 32 V)
- ▲ Protection class IP65 (front panel and keypad)

### EA14 – Universal Display

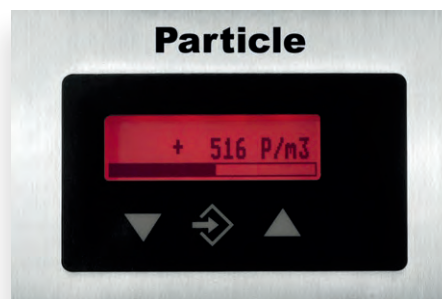

- ▲ Measuring ranges:  
Freely definable areas and units
- ▲ Input signal display  
0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA, 3-wire

## Characteristics

- ▲ Monitoring of the room parameters in clean rooms
- ▲ Touch-sensitive display with a very high contrast and an enormous luminosity
- ▲ Easy-to-use touch display even when wearing gloves or using touch pens, etc.
- ▲ Visualisation of up to four measured values simultaneously
- ▲ Data logging on secured SD card
- ▲ Parameterisation via micro USB port
- ▲ Visualisation of the measurement value curves directly on the device
- ▲ Warning messages in plain text
- ▲ Designation of the unit on the display freely selectable for easy mapping
- ▲ Communication via standard analog signals and other optional interfaces
- ▲ Four freely programmable switching contacts (different channels can be combined)
- ▲ Various colour profiles can be selected for better usability
- ▲ Integrated acknowledge function for warning signals

## EA16 – Measuring Display Unit 3,5" Touch LCD



## Characteristics

- ▲ Pt100, 4-wire
- ▲ Class B as standard, Class A, 1/3 or 1/10 DIN upon request
- ▲ Integrated, precise 2-wire miniature head transmitter
- ▲ High degree of repetition accuracy
- ▲ Integration into wall mounting panels
- ▲ In-situ calibration
- ▲ Measuring ranges:  
Programmable between – 50 and + 200 °C
- ▲ Output signal transmitter  
4 ... 20 mA, 2-wire
- ▲ Operating voltage  
24 V DC
- ▲ Protection class IP65

## TW68 - Compact Resistance Thermometer with Miniature Head Transmitter



## PANEL EXAMPLES CLEAN ROOM




The measuring instruments, sensors and operating elements in the clean room panels can be combined randomly according to requirements. Following types of installations are possible:

- ▲ Wall-mounting
- ▲ Surface installation
- ▲ Channel assembly

## PRODUCT OVERVIEW

Our clean room panels are produced according to our customer requirements. Hereafter please find a description, based on a randomly selected example.

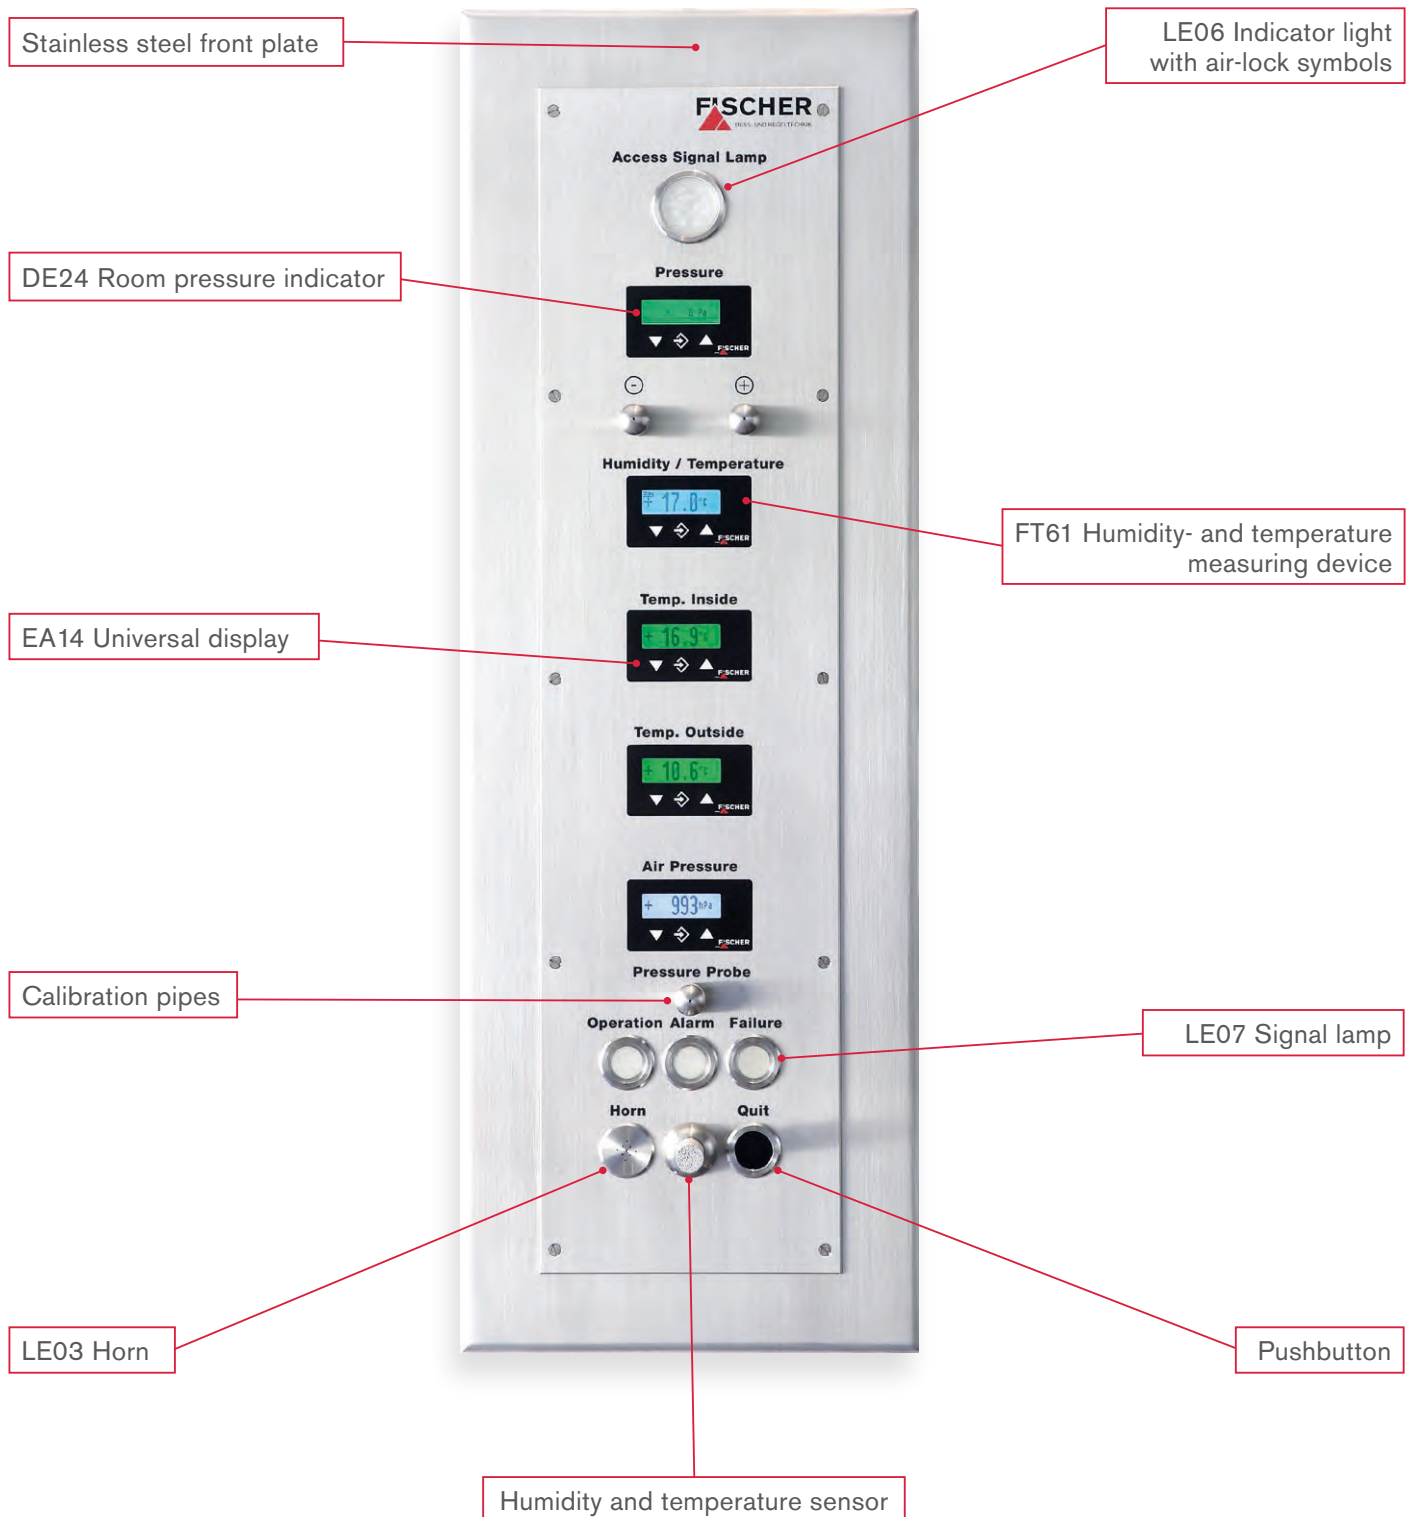

## SAFETY LABORATORIES

Accurate Control and Monitoring – with **FISCHER**



Safety laboratories are spaces in which biological or potent genetic materials (particularly microorganisms) are researched or developed. These spaces are subject to biomaterial regulations and / or genetics safety regulations.

In accordance with these regulations, spaces are classified in one of four security grades - from S1 to S4. If an airborne infection can occur, the spaces and the upstream air-locks, showers, etc. must be held under

controlled vacuum conditions. It may also be the case that a disinfection of the rooms with  $H_2O_2$  or formalin is mandated, making it necessary for suitable isolation devices to be installed around the measuring instruments.

FISCHER has developed special measuring instruments, isolation devices and room pressure sensors for application in safety laboratories.








**The New Generation**  
with touch-sensitive display units

## MEASURING EQUIPMENT TECHNOLOGY SAFETY LABORATORIES


### DE46 – Room Pressure Transmitter / Display with attached Shut-off Valve Block DZ67

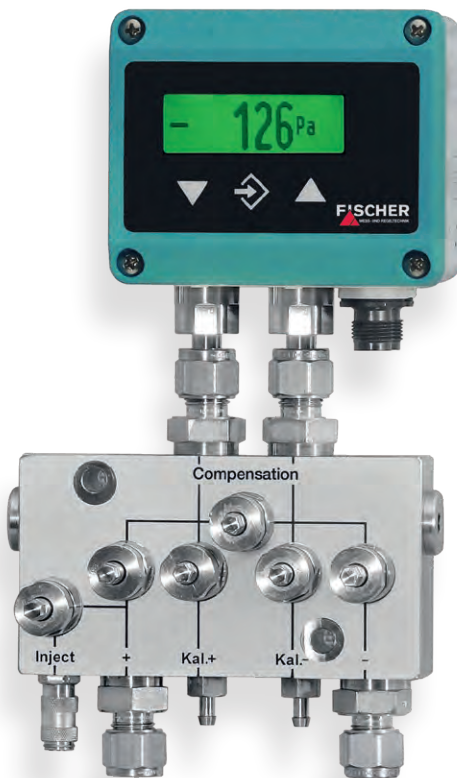

- ▲ Capacitive low-pressure sensor
- ▲ Long-term stable without recalibration
- ▲ High repeatability
- ▲ LC display with colour change of backlighting as clean room signal light
- ▲ User prompt in clear text
- ▲ In-situ calibration or adjustment
- ▲ Integrated control unit / zeroing, calibration and setting without PC
- ▲ Password-protected to prevent unauthorised access
- ▲ Industry standard analogue output
- ▲ Measuring ranges:  
Unidirectional: 0 ... 50 Pa to 0 ... 1000 Pa  
Bidirectional:  $\pm 25$  Pa to  $\pm 100$  Pa
- ▲ Max. static pressure up to 100 kPa
- ▲ Output signal transmitter  
0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA, 3-wire
- ▲ Output signal contacts  
2 independent programmable solid state relays
- ▲ Operating voltage  
24 V DC/AC (20 ... 32 V)
- ▲ Protection class IP65 (front panel and keypad)
- ▲ Shut-off valve block with 6 spindle seat valves with settings for:
  - Measuring operation
  - Zero-point check
  - Sensor calibration / adjustment
  - Disinfection of room pressure line
- ▲ Completely made of stainless steel, gaskets made of resistant polymer
- ▲ Large nominal width for disinfection with formalin

## PANEL EXAMPLES SAFETY LABORATORIES

Implementation according to the particular requirements.

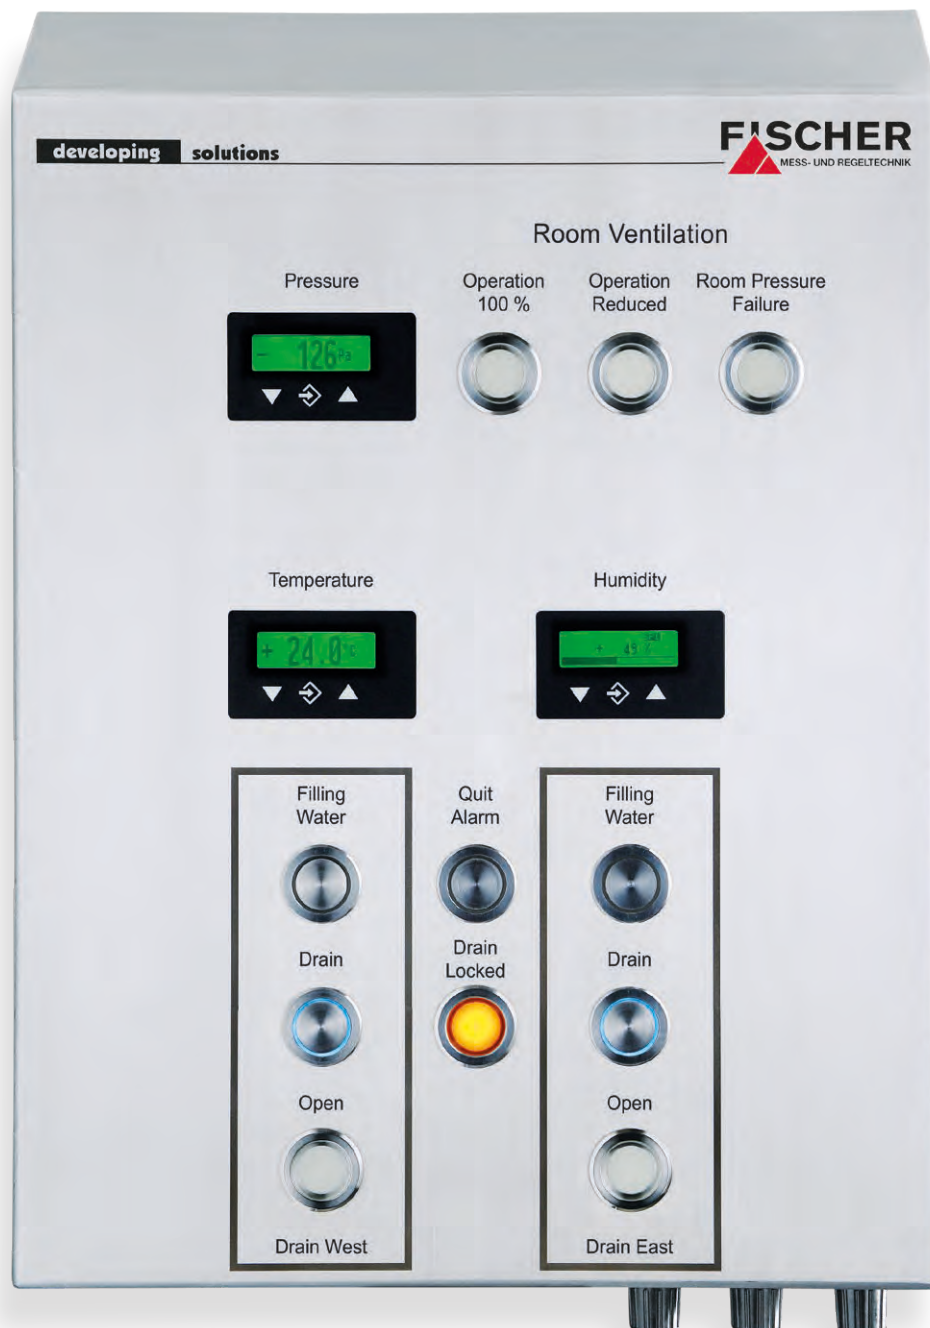

## ACCESSORIES CLEAN ROOM AND SAFETY LABORATORIES

### LE06 – Air-lock Symbols



- ▲ Gas tight air-lock symbols
- ▲ Discretely controllable symbols:
  - Green arrow
  - Yellow triangle
  - Red crossed circle
- ▲ Operating voltage 24 V DC, Power consumption 75 mA

### LE10 – Signal Lamp



- ▲ Concentric circles:
  - Green
  - Red
- ▲ Power consumption approx. 20 mA

### Bulkhead Pipe Fitting



- ▲ Completely made of stainless steel
- ▲ For ceiling/wall thicknesses of 50 to 250 mm
- ▲ Special lengths on request

### Indicator Lights for Safety Laboratories



- ▲ Gas tight LED indicator lights
- ▲ Available colours:
  - Green
  - Yellow
  - Red
  - Blue
  - White
- ▲ Operating voltage 24 V DC, Power consumption 60 mA

### Reference Pressurised Container



- ▲ Material: Aluminium
- ▲ Attenuator to reduce the atmospheric pressure fluctuation in the reference pressure line
- ▲ Installation in rooms with no forced ventilation in line with the reference pressure distributors

Further accessories (for example calibration pipes, reference pressure connections, reference pressure boxes, selector switch etc.) are available.



## Room Pressure Probe with Hepa Filter



- ▲ Housing and internal parts made of stainless steel
- ▲ Fumigation resistant polymer gaskets
- ▲ Easy-to-exchange H14 filter
- ▲ Housing and internal parts autoclavable

## Calibration Valve for Wall Mounting Panels



- ▲ Housing and internal parts made of stainless steel
- ▲ Fumigation resistant polymer gaskets
- ▲ Reduces time calibration considerably
- ▲ Protected from misuse by special key

## Reference Pressure Distributor



- ▲ Housing made of stainless steel
- ▲ Pressure connections as
  - Quick-release coupling or
  - Plug-in coupling
- ▲ Reduces the time expended on installation considerably



Fair Exhibit

# PRODUKTÜBERSICHT

## DE44 and DE45 Digital Differential Pressure Switch/Transmitter, with Colour Change LCD



Measuring range > 4 mbar  
 0 - 20 mA  
 4 - 20 mA 3-wire  
 0 - 10 V  
 Square-rooting display/output  
 LC display  
 Operating voltage 24 V DC/AC  
 Operation: Membrane keypad-  
 PC adapter EU 05  
 PC software  
 Screw connection  
 for hoses  
 Relay/Semiconductor contact  
 Optional: Panel mounting  
 Flush mount clean room  
 application  
 ATEX II3G - LC display version  
 ATEX II3D - LC display version

## DE23 Differential Pressure Transmitter



Low pressure measurable with  
 long-term drift  
 Measuring ranges:  
 4 - 20 mA 2-wire  
 0 - 10 V 3-wire  
 LCD-measuring value display  
 Operating voltage 24 V DC/AC  
 Optional:  
 Mounting rail,  
 wall mounting plate

## DE46 Digital Differential Pressure Switch/Transmitter, with Colour Change LCD



Measuring range > 25 Pa  
 0 - 20 mA  
 4 - 20 mA 3-wire  
 0 - 10 V  
 Square-rooting display/output  
 LC display  
 Operating voltage 24 V DC/AC  
 Operation: Membrane keypad-  
 PC adapter EU 05  
 PC software  
 Screw connection  
 for hoses  
 Relay/Semiconductor contact  
 Optional: Panel mounting  
 Flush mount clean room application  
 ATEX II3G - LC display version  
 ATEX II3D - LC display version

## EA14F Level Indicator with Colour Change LCD



Measuring of pressure/filling level  
 by evaluating external sensor values  
 Possible input signal from external  
 sensor:  
 0 - 20 mA  
 4 - 20 mA 3-wire  
 0 - 10 V  
 Output signal:  
 0 - 20 mA  
 4 - 20 mA 3-wire  
 0 - 10 V  
 LC display  
 Operating voltage 24 V DC/AC  
 Operation:  
 Membrane keypad-  
 PC adapter EU 05  
 PC software  
 Relay/Semiconductor contact  
 Optional: Panel mounting

## DE90 Digital Differential Pressure Transmitter

- ▲ Measuring range unidirectional  
 0...25 Pa  
 to 0...25 kPa
- ▲ Measuring range bidirectional  
 ± 25 Pa  
 to ± 25 kPa
- ▲ Switchable analog  
 output signals 3-wire
- ▲ Optional: Modbus
- ▲ LCD measured value display
- ▲ 1-or 2-channel
- ▲ Explosion protection:  
 Optional  
 ATEX Zone 2 or 22
- ▲ Semiconductor contacts

**Multifunctional Device**

## DE49\_0 Digital Differential Pressure Transmitter



Measuring range > 4 mbar  
 4 - 20 mA 2-wire  
 Square-rooting display/output  
 LC display  
 Operating voltage 24 V DC  
 Operation: Membrane keypad  
 Screw connection  
 for hoses  
 Explosion proof:  
 II 1/2 G Ex ia IIC T4  
 II 2 D Ex ia D 21 T80 °C  
 - 10 ... + 60 °C  
 0 ... 4 mbar, p max. 50 mbar up to  
 0 ... 100 mbar, p max. 500 mbar

## KLIMATECHNIK UND LÜFTUNGSTECHNIK

### DE39 Digital Differential Pressure Transmitter with Colour Change LCD for fluid media



$\Delta P$  measuring by calculating the difference between two Pressure sensors

Pressure stages: 6 - 40 bar

0 - 20 mA  
4 - 20 mA 3-wire  
0 - 10 V

LC display  
Operating voltage 24 V DC/AC

Operation: Membrane keypad-PC adapter EU 05  
PC software

Cutting ring connection / female thread G1/8

Relay / Semiconductor contact

Optional: Panel mounting

ATEX II3G - LC display version

### EA14D Level Indicator with Colour Change LCD



$\Delta P$  measuring by calculating the difference between two pressure sensors

Measuring ranges: 2,5 - 100 bar

0 - 20 mA  
4 - 20 mA 3-wire  
0 - 10 V

LC display  
Operating voltage 24 V DC/AC

Operation: Membrane keypad-PC adapter EU 05  
PC software

Relay / Semiconductor contact

Optional: Panel mounting



### EA15 Measuring Display Unit with 2,8" Touch LCD



Measuring display device for external sensors

Possible input signal:  
Up to four input signals, analogue standard signals, freely programmable

Electronic output signals:  
Up to four output signals, analogue standard signals, freely programmable

2,8" TFT Touch LCD

Operating voltage 24 V DC/AC

Operation:  
Touch-sensitive Display  
Relay semiconductor contact

Optional:  
Digital interface  
Data logging on secured SD card

### EA14F / M Level Indicator with Colour Change LCD



Measuring of pressure / filling level by evaluating external sensor values

Possible input signals of external sensor:

0 - 20 mA  
4 - 20 mA 3-wire  
0 - 10 V

Output signal:

0 - 20 mA  
4 - 20 mA 3-wire  
0 - 10 V

LC display  
Operating voltage 24 V DC/AC

Operation: Membrane keypad-PC adapter EU 05  
PC software

Relay / Semiconductor contact

Optional: Panel mounting



Please find further information about FISCHER and our products on our homepage:  
[www.fischermesstechnik.de/en](http://www.fischermesstechnik.de/en)

FISCHER Mess- und Regeltechnik GmbH provides a perfectly tailored range of models for clean rooms and safety laboratories, as well as for many other applications.

The measuring instruments are distinguished by:

- ▲ Families of measuring instruments for various measuring tasks
- ▲ Comfortable menu navigation
- ▲ Some instruments with extended proofs (EAC, SIL, PLd, DNV GL, EX, structural testing, etc.)
- ▲ Industry-compliant equipment for housings and process connections
- ▲ Special instruments with colour-change displays for visualisation of operating conditions (e.g. warnings, alarms)
- ▲ Customer-specific system solutions

Numerous references prove the quality of our products.

FISCHER Mess- und Regeltechnik GmbH offers individual concept solutions for your application.

We are an owner-operated family business with efficient decision-making processes.

We offer our customers tailored systems and product solutions, as well as OEM products.

Our devices and solutions are optimally suited for a variety of applications, such as:

- ▲ Pressure measurement
- ▲ Differential pressure measurement
- ▲ Flow measurement
- ▲ Temperature measurement
- ▲ Level measurement
- ▲ Humidity measurement
- ▲ Control Systems

Contact details can be found on our website:

**[www.fischermesstechnik.de](http://www.fischermesstechnik.de)**

**FISCHER Mess- und Regeltechnik GmbH**

Bielefelder Straße 37a · 32107 Bad Salzuflen · GERMANY · Fon +49 5222 974-270 · Fax +49 5222 7170  
Mail: [info@fischermesstechnik.de](mailto:info@fischermesstechnik.de) · Web: [www.fischermesstechnik.de](http://www.fischermesstechnik.de)